

new atlas

GN 1/1 freezer counter – Depth 700



The new range of "NEW ATLAS" freezer and refrigerated tables, available with a depth of 600 mm or 700 mm, is designed and manufactured to the highest quality standards.



The tables are provided with electrical defrosting system by heating elements and with a device for automatic elimination of condensate water.

They are also available with built-in condensing unit or prearranged for a remote condensing unit with a valve system, in a normal and low temperature solution.

Equipped with 1, 2, 3 or 4 doors, with the possibility of installing drawer units with 2 or 3 drawers. Accessories provided: 1 GN 1/1 rack per door.

Prearranged to be installed on plinth.

Counters available with 10/10 thickness stainless steel normal worktops or with rear riser.

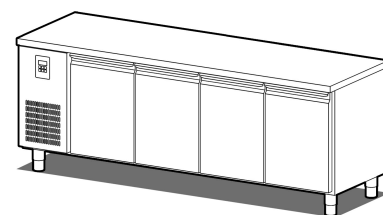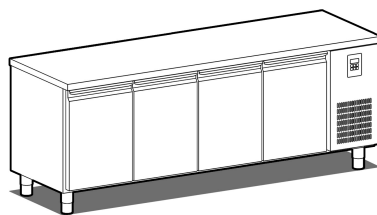

TECHNICAL DATA:

		TGB7D/220			TGB7S/220		
Body	mm	660			660		
External dimensions without worktop TGB7D(S)/...S (WxDxH)	mm	2210x690x810			2210x690x810		
External dimensions with normal worktop TGB7D(S)/...			2220x700x850			2220x700x850	
External dimensions with worktop with rear riser TGB7D(S)/...A				2220x700x950			2220x700x950
Capacity	lt	556			556		
Technical compartment position		right			left		
Doors	nr	4			4		
Evaporators	nr	2			2		
Equipment (GN 1/1 shelves)	nr	4 GN 1/1			4 GN 1/1		
Control panel		digital control by back panel			digital control by back panel		
Cooling system		ventilated			ventilated		
Temperature	°C	-15/-20			-15/-20		
Defrosting system		automatic by heating elements			automatic by heating elements		
Condensate water elimination		automatic			automatic		
Max absorbed power *	W	880			880		
Cooling power **	W	790			790		
Gas		R290			R290		
Input voltage		1x230V/50Hz			1x230V/50Hz		
Climatic class		5			5		

*Evap. -10°C cond. +45°C **ASHRAE (Evap. -23.3°C cond. +54.4°C)



Internal detail



Back panel control board




Drawer detail



Detail of s/s worktop edge

ACCESSORIES AND SURCHARGES ON REQUEST:



CR7/2BT Freezer drawer unit with 2 1/2 drawers (surcharge)



Pair of runners for GN 1/1 shelf



GN 1/1 shelf

GN 1/1 s/s shelf



Set of Ø 125 castors



Wi-Fi supervising system (surcharge)



60Hz Voltage

INSTALLATION DIAGRAM:

