

labor plus

Refrigerated counters for chocolate



Chocolate and pralines are delicate foods that necessitate of a perfect microclimate where temperature and humidity are controlled by using specific equipment suitable for conservation and storage. The refrigerated counters LABOR PLUS series are the best that a professional could ask for. Made by respecting the highest possible quality standard, they maintain the construction features of LABOR series.

At these features must be added a kit equipped with an electronic probe that allows the humidity inside the tables to be controlled with utmost precision. The counters are fitted with electronic control panel that permits the constant visualization of temperature and humidity to ensure an always optimal product preservation.

40 mm s/s work tops are reinforced with 15/10 thickness. Equipment includes no. 7 pairs of runners per door with 65mm pitch.



45-65%

TECHNICAL DATA:

TAPC/21

Body	mm	710	
External dimensions without worktop (WxDxH)	mm	2090x770x860	
External dimensions with s/s worktop		2100x800x900	
External dimensions with c/ with backsplash			2100x800x1000
Capacity	lt	575	
Technical compartment position	dx		
Doors	nr	3	
Evaporator	nr	1	
Equipment (pairs of runners)	nr	21	
Electronic control		digital	
Temperature	°C	+4/+18	
Relative humidity		45-65%	
Defrosting type		automatic by heating elements	
Condensate water elimination		automatic	
Maximum absorbed power (in defrost phase) *	W	400W heating	
Refrigeration power *	W	380W	
Gas		R290	
Voltage supply		1x230V/50Hz	
Climatic class		5	



Refrigeration system HSS "Static/Assisted":

- perfect uniformity of cell internal temperature
- good level of relative humidity
- lower energy consumption

*Evap. -10°C cond. +45°C



Internal detail



No. 7 pairs of runners per door (65 mm pitch)




Control board



Detail of stainless steel worktop edge

ACCESSORIES AND SURCHARGES ON REQUEST:



CRP/2 Refrigerated drawer unit with 2 1/2 drawers (surcharge)



Pair of runners



Rilsan rack 60x40 cm



S/s tray 60x40x2h cm
S/s tray 60x40x3h cm




Castor Ø 125 mm (surcharge)
Self-locking castor Ø 125 mm (surcharge)




Wi-Fi supervising system (surcharge)

60Hz frequency

INSTALLATION DIAGRAM:

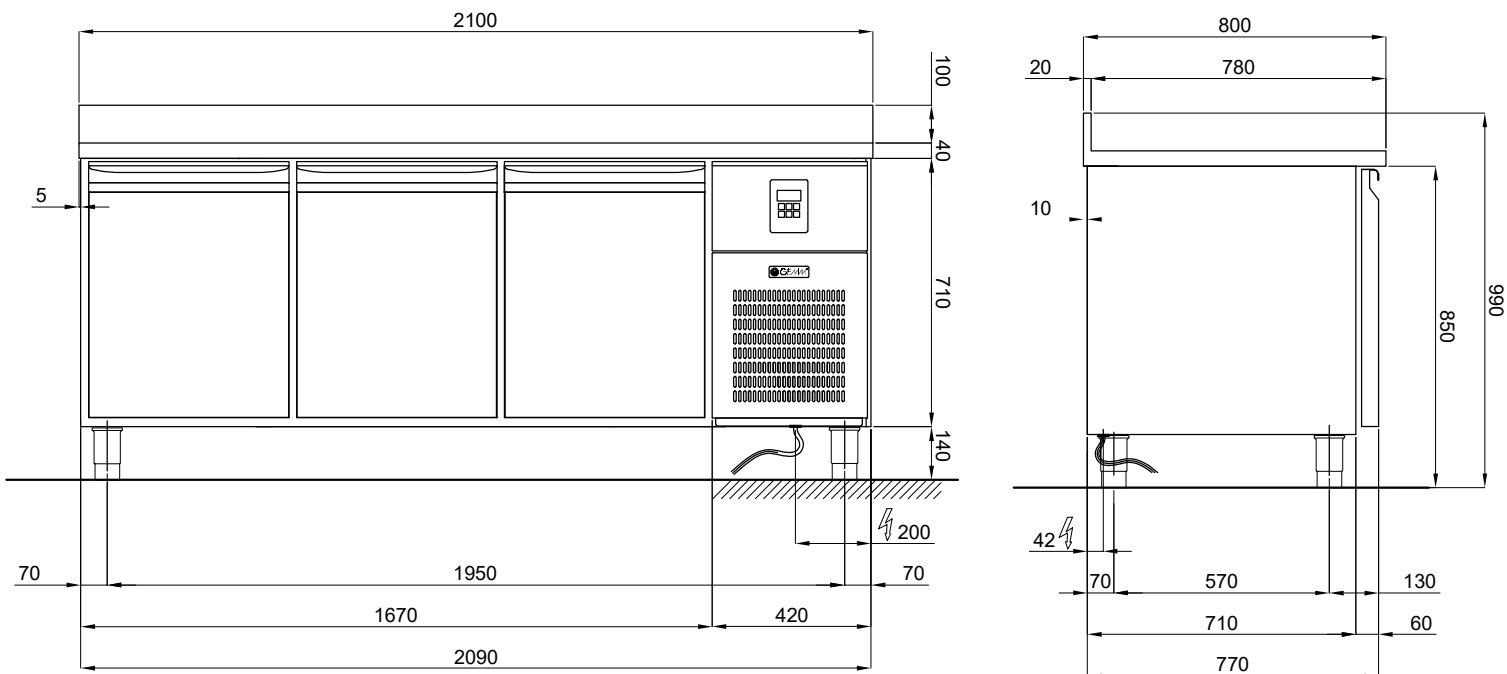

PART. INGOMBRO PORTE SCALA 1 : 50

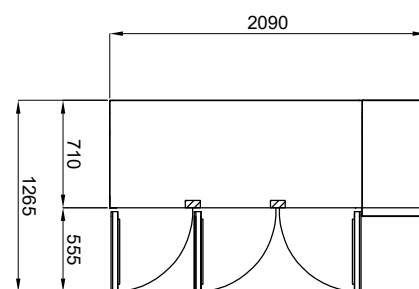

EL. SUPPLY: 230 V ~ 1 - 50Hz (* SHUKO plug) - 2 mt wire length